



NATIONAL MAGNETICS GROUP, INC.

MANUFACTURERS OF MAGNETIC AND ADVANCED MATERIALS

AFFILIATE: TCI CERAMICS, INC.

M100 Material


A high permeability MnZn ferrite designed for a range of applications including broadband and pulse transformers, common-mode chokes and inductors.

Specifications


Property	Unit	Symbol	Standard Test Conditions	Value
Initial Permeability		μ_i	Frequency=10 kHz; B<10 gauss	10000 \pm 30%
Saturation Flux Density	gauss	B_s	H=5 oersted	\approx 4200
Residual Flux Density	gauss	B_r		\approx 800
Coercive Force	oersted	H_c		\approx 0.05
Loss Factor	10^{-6}	$\text{Tan} \delta / \mu_i$	Frequency=30 kHz; B=1 gauss	\leq 10
Temperature Coefficient of Initial Permeability (20-70°C)	%/°C			\leq 0.5
Volume Resistivity	Ω cm	ρ		\approx 20
Curie Temperature	°C	T_c		\geq 135

Note: values are typical and based on measurements of a standard toroid at 25 °C


Complex Permeability vs. Frequency

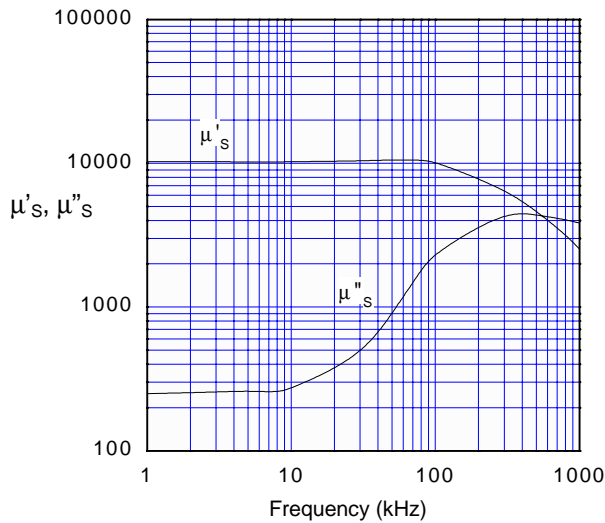


B - H Loop

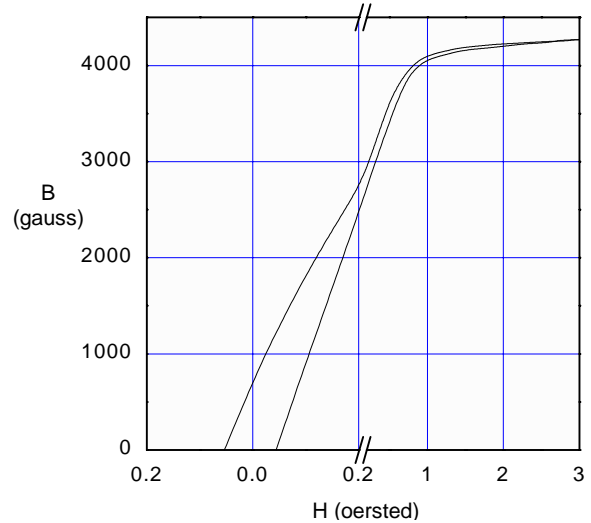

Initial Permeability vs. Temperature

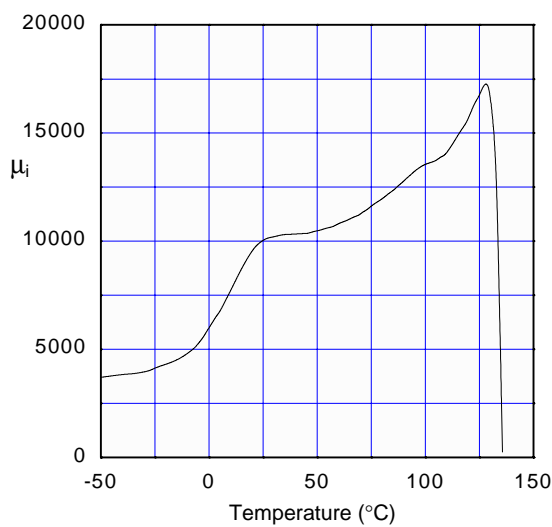

Incremental Permeability vs. Field Strength

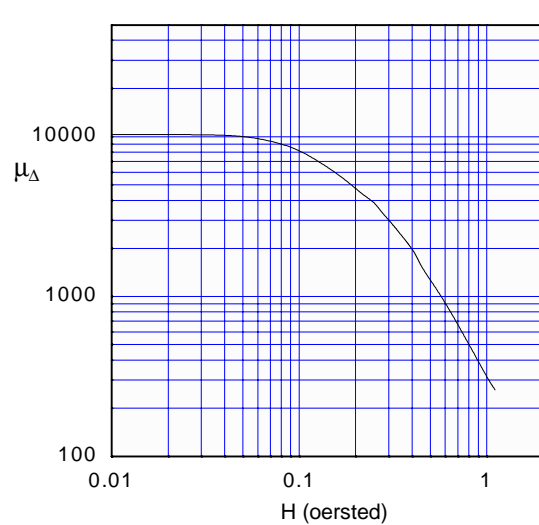

FERRITES • MAGNETS • IRON CORES • GARNETS • DIELECTRICS • RESONATORS • POWDERS

1210 WIN DR.
BETHLEHEM, PA 18017-7061